

TURBO ASIA PACIFIC CO., LTD.

บริษัท เทอร์โบ เอเชีย แปซิฟิค จำกัด

Turbo Manometer Gauge (Model : TG-2000)



Measuring ranges




Model	Measuring ranges	Accuracy
TG-2000	0 - 300 mmH2O	2%
	0 - 500 mmH2O	2%

General

TG-2000 Series micro-differential pressure meters are widely used in monitoring positive or negative pressure of clean room, differential pressure between filter, negative pressure of hearth, pressures of fan or blowing machine, etc in addition, it can also be used for the quality control of air-gas proportion in combustion process and control of automatic valves.

Description

- Accuracy : $\pm 2\%$ fs below 21°C
- Ambient temperature in use : $-7^{\circ}\text{C} \sim 60^{\circ}\text{C}$
- Rated pressure : approximately $-68 \sim 103 \text{ kPa}$
- Overpressure : overpressure plug bursts at 172 kPa approximately.
- Process connection : $1/8''$ teger pipe thread is used for high pressure and hole low pressure, in two groups (each group for side and back) with shell made of : squeeze film cast aluminum.
- Standard accessories : $1 1/8''$ NPT end caps, $2 1/8''$ rubber pipe fittings with thread grind-ing, 3 clips for installation screw

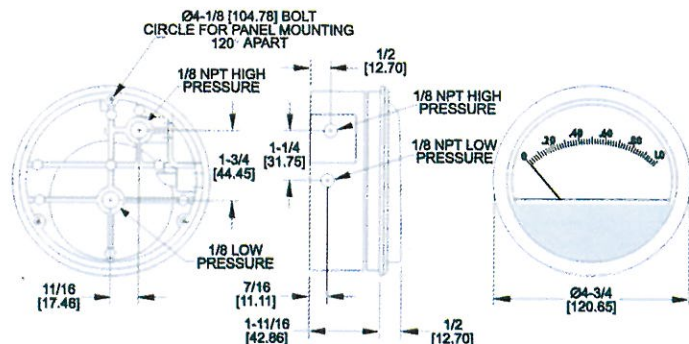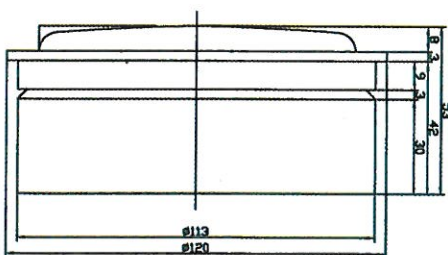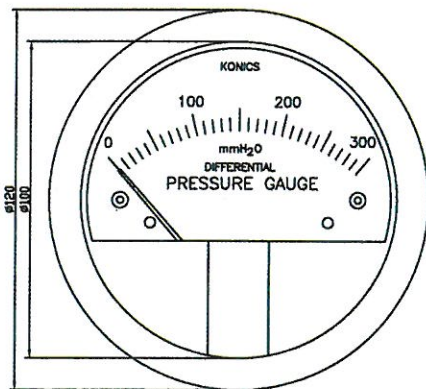

71/52 Moo 11 Soi Tanasit, Theparak Rd., Bangpla, Bangplee, Samutprakarn, 10540 ,Thailand

71/52 หมู่ 11 ซ.ธนสิทธิ์ อ.เทพารักษ์ ต.บางปลา อ.บางพลี จ.สมุทรปราการ 10540

Tel: (662) 752 - 5911 Fax: (662) 752 - 5912 <http://www.turboasia.co.th> E-mail : contact@turboasia.co.th